


SP277

9. Connect the reverse gear selector cable (6); then install the cable bracket (5).
10. Install the clutch cable to the clutch actuator lever.

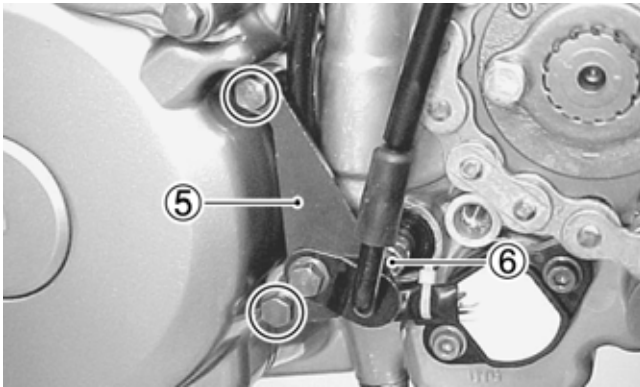

SP278

11. Install the carburetor and tighten the clamps securely.
12. Install the spark plug cap, engine sprocket cover, oil drain, tank, and breather hose; then install the gas tank and body.
13. Fill the oil tank. See Section 2.
14. Fill the cooling system with the appropriate mix of Arctic Cat anti-freeze and water. See Section 2.
15. See Section 2 for all adjustments.
16. Connect all remaining electrical connections; then install the battery making sure to connect the positive battery cable first and the negative cable last.
17. Install the seat making sure it “locks” into position.

⚠ CAUTION

If the engine had a major overhaul or if any major part was replaced, proper engine break-in procedures must be followed (see Section 1). If the proper engine break-in procedures are not followed, severe engine damage may result.